


AXTONE 1g BUFFER

Long stroke buffer acc. EN 15551 and UIC 526-3 leaflets with the stroke of 150 mm which additionally reduce acceleration on the good up to 1g for defined impact conditions. It is equipped with type Combigard E 105 shock absorber (combination of hydraulic with EuroPad solid elastomer spring). The buffer casing is manufactured in a unique process of hot extrusion. The buffer has good working parameters and operational reliability within the temperature range from -40°C to $+50^{\circ}\text{C}$. The buffer is delivered with a buffer heads 450 or 550. The product has the TSI certificate.



Contact:

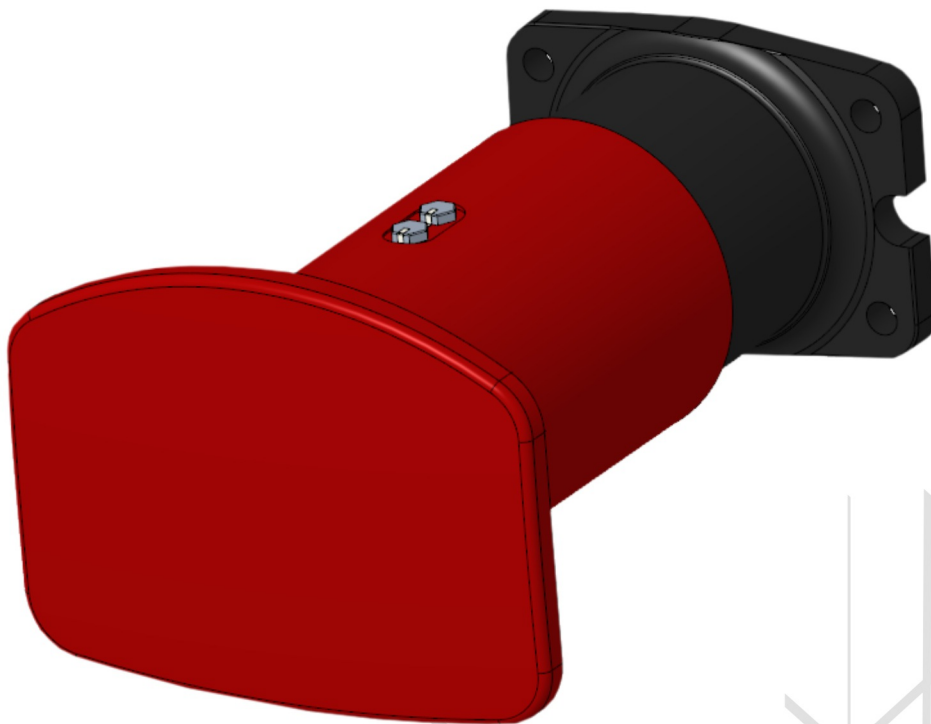